





SULLAIR®

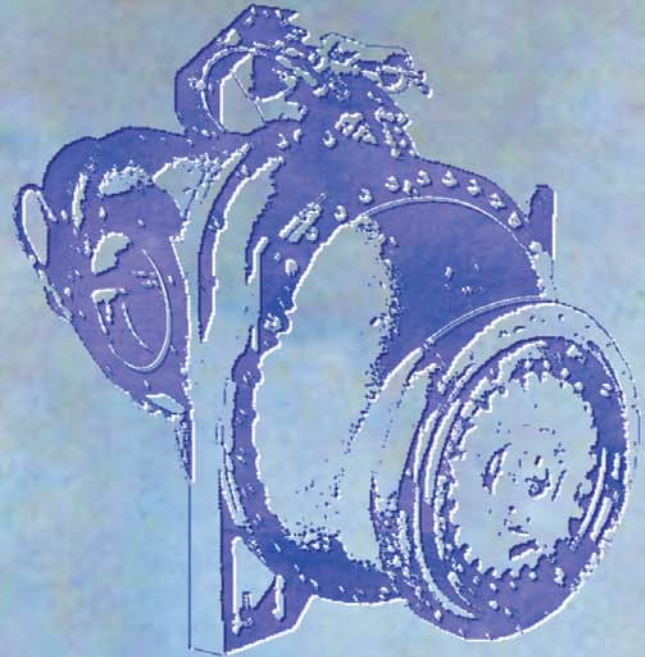

DRILL COMPRESSOR

500 - 1500 CFM
250 - 500 PSI

DIM	1.7 L/D	2.2 L/D
A	6.0	8.0
B	21.31	23.31
C	2.50	3.00

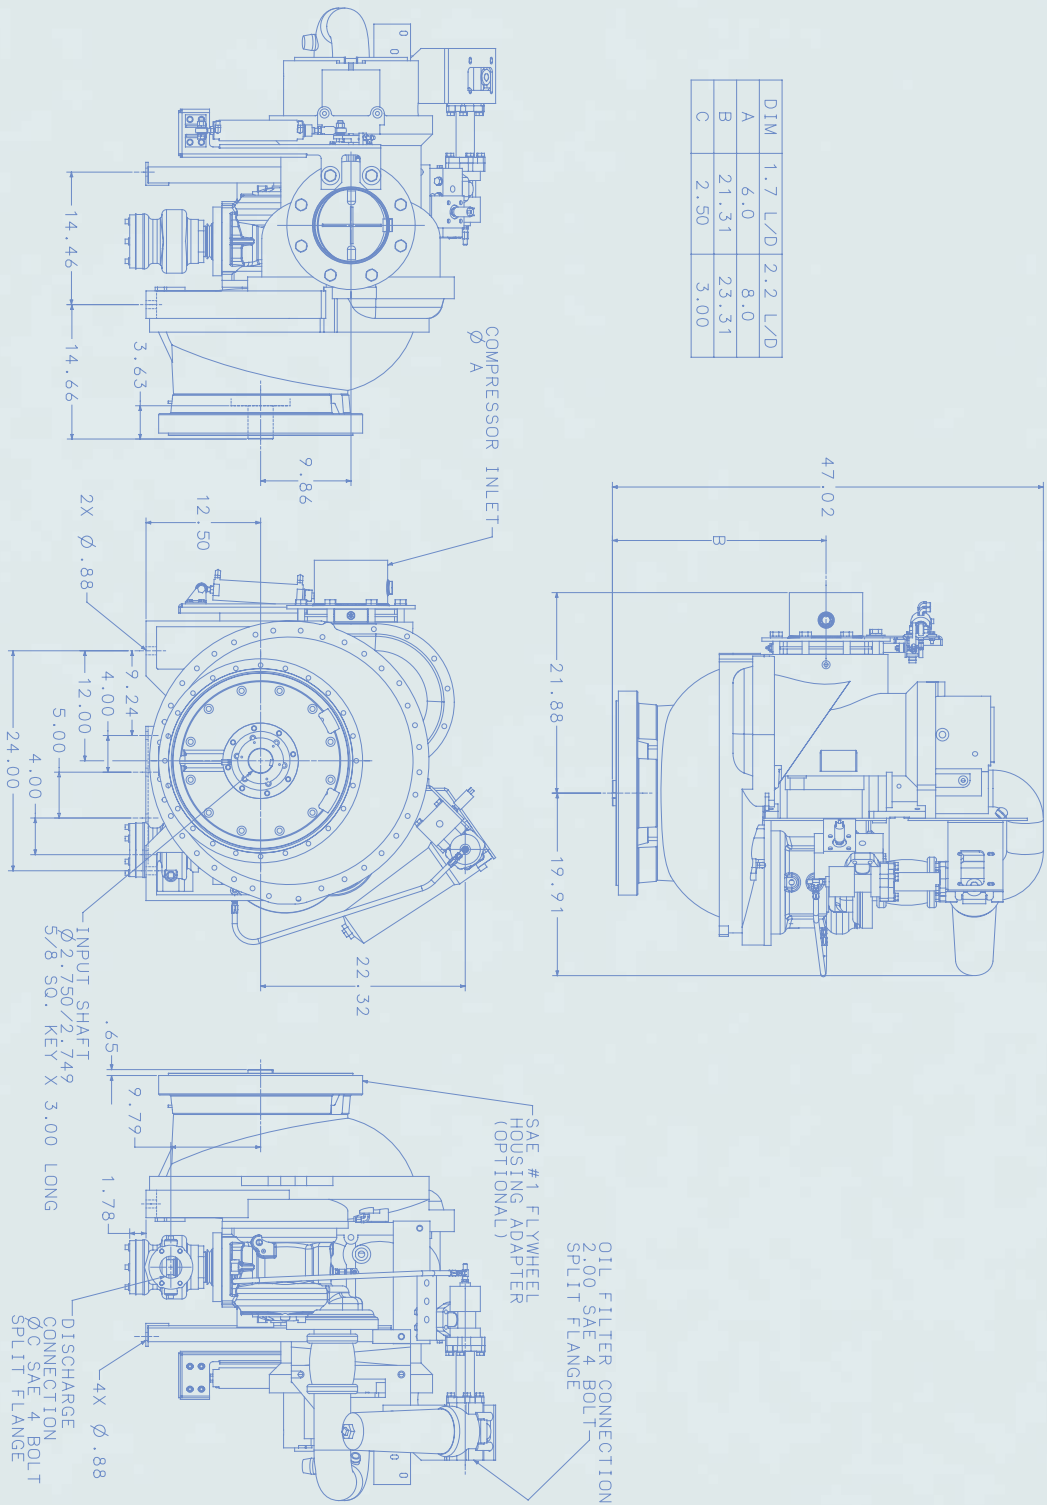



Drill Compressor Horse Power Requirements*

MODEL	PSIG (BAR)	ICM / BHP 1.7 L/D		ICM / BHP 2.2 L/D	
		AT 1800 RPM	AT 2100 RPM	AT 1800 RPM	AT 2100 RPM
500	250 (17.2)	534 / 177	N / A	N / A	N / A
500	350 (24.1)	534 / 203	N / A	N / A	N / A
500	500 (34.5)	533 / 238	N / A	N / A	N / A
750	250 (17.2)	789 / 265	789 / 265	N / A	N / A
750	350 (24.1)	789 / 304	789 / 302	N / A	N / A
750	500 (34.5)	789 / 357	789 / 353	N / A	N / A
900	250 (17.2)	928 / 318	923 / 315	928 / 318	N / A
900	350 (24.1)	928 / 367	923 / 362	928 / 348	N / A
900	500 (34.5)	928 / 434	923 / 425	928 / 400	N / A
1150	250 (17.2)	N / A	N / A	1182 / 414	1174 / 414
1150	350 (24.1)	N / A	N / A	1182 / 463	1174 / 457
1150	500 (34.5)	N / A	N / A	1182 / 535	1174 / 526
1350	250 (17.2)	N / A	N / A	1367 / 491	1381 / 503
1350	350 (24.1)	N / A	N / A	1367 / 554	1381 / 558
1350	500 (34.5)	N / A	N / A	1367 / 643	1381 / 643
1500	250 (17.2)	N / A	N / A	1495 / 548	1500 / 554
1500	350 (24.1)	N / A	N / A	1495 / 621	1500 / 619
1500	500 (34.5)	N / A	N / A	N / A	1500 / 715

*The ratings in this table should be used to compare the different Sullair compressors to each other. Actual performance may vary depending on site conditions and package design.

When you need...

...from 250 to 500 psig (17.2 to 34.5 bar) air, the 500 (14.2 m³/min) to 1500 cfm (42.5 m³/min) Sullair drill compressors can't be beat. Their rugged, two stage rotary screw design ensures they will be a match for any drilling application.

Custom Engineering

Sullair Drill Compressors offer custom design and engineering services that give customers the most effective solution for their compressor applications. Careful review of specifications lets us determine whether they'll fit the application requirements we've developed from our years of experience. And Sullair drill compressor systems can be used with virtually any power source.

Rotary Screw Reliability

Two rotors are the only major moving parts in each stage of the 2-stage rotary screw compressor units. Such mechanical simplicity gives the compressor unit great dependability and long life. Our two-year warranty covers loss of capacity caused by wear, as well as defects in material and workmanship.

Installation Assistance

Of course installation requirements will vary... that's why our specialized service is available. You benefit from our years of experience with drill compressor units which enables us to assist you in designing an installation for each specific application.

SULLAIR CORPORATION
 3700 East Michigan Boulevard
 Michigan City, Indiana 46360 U.S.A
 www.sullair.com
 Telephone: 1-800-SULLAIR (U.S.A. only)
 Fax: 219-874-1273

CUSTOMER CARE
for PARTS and SERVICE
 1-888-SULLAIR (785-5247)
 219-874-1835

Specifications

COMPRESSOR:	500-1500 CFM (20/12 Two-stage Series)
Type:	Rotary Screw
Maximum Operating Pressure:	350 psig (24.13 bar) 500 psig (34.5 bar)
Cooling:	Pressurized Fluid