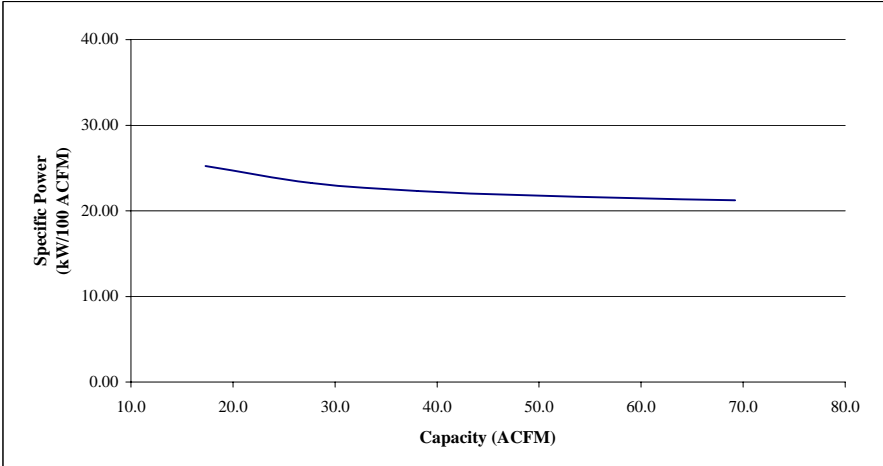


COMPRESSOR DATA SHEET
Rotary Screw Variable Frequency Drive Compressor

MODEL DATA - FOR COMPRESSED AIR

1	Manufacturer: Sullair Corp		
2	Model Number: 1107eV		Date: January 1, 2009
	X Air-cooled	Water-cooled	# of Stages: 1
X Oil-injected	Oil-free		
3	Full Load Operating Pressure	100	psig ^b
4	Maximum Full Flow Operating Pressure	100	psig ^c
5	Drive Motor Nameplate Rating	15	hp
6	Drive Motor Nameplate Efficiency	92.4	percent
7	Fan Motor Nameplate Rating (if applicable)	1	hp
8	Fan Motor Nameplate Efficiency	82.5	percent
9	Input Power (kW)	Capacity (acfm) ^{a,e}	Specific Power (kW/100 acfm) ^e
	14.7	69.2	21.24
	12.6	58.8	21.48
	10.6	48.4	21.81
	8.5	38.1	22.33
	6.4	27.7	23.23
	4.4	17.3	25.23
10	Total Package Input Power at Zero Flow ^d	0.0	kW
11	 <p align="center">Note: Graph is only a visual representation of the data in Section 9</p>		

NOTES:

- a. Measured at the discharge terminal point of the compressor package in accordance with Annex E to ISO 1217; acfm is actual cubic feet per minute at inlet conditions.
- b. The operating pressure at which the Capacity and Electrical Consumption were measured for this data sheet.
- c. Maximum pressure attainable at full flow, usually the unload pressure setting for load/no load control or the maximum pressure attainable before capacity control begins. May require additional power.
- d. No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- e. Tolerance is specified in Annex E to ISO 1217 as follows:
 NOTE: The terms "power" and "energy" are synonymous for purposes of this document.

Member:



Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy
<u>m³ / min</u>	<u>ft³ / min</u>	%	%
Below 0.5	Below 15	+/- 7	+/- 8
0.5 to 1.5	15 to 50	+/- 6	+/- 7
1.5 to 15	50 to 500	+/- 5	+/- 6
Above 15	Above 500	+/- 4	+/- 5