

To Provide Compressed Air System is Our Core Business

For the lowest purchasing cost for customer, Sullair provides an entire air system designed to lower operating cost, increase reliability and maximize return on investment.



Sullair offers compressed air system to help users reduce their operating costs and improve productivity by analyzing, managing and controlling all compressed air systems. To satisfy your special requirement on the compressed air system, please contact the Sullair distributor to seek more help. To acquire Sullair distributor's contact information, see the below website or make a phone call.



Sullair Asia Ltd.
Zuo Pao Tai Road, Chiwan Shenzhen 518068, China Tel: 86-755-26851686 Fax: 86-755-26853475

Shenzhen Sullair Asia Ltd.
Zuo Pao Tai Road, Chiwan Shenzhen 518068, China Tel: 86-755-26851686 Fax: 86-755-26853475

Suzhou Sullair Air Equipment Co., Ltd.
No.266 Changyang Street, Suzhou Industrial Park, Suzhou, Jiangsu, China Tel: 86-512-87162388 Fax: 86-512-87162389

Sullair Singapore Ltd.
74 Joo Koon Circle, Jurong, Singapore 629093 Tel: 65-68611211 Fax: 65-68612967

Sullair Taiwan Ltd.
3F-1, No.248, Chung-Shan Road Lin-kou Hsiang, Taipei Hsien Tel: 886-2-26013500 Fax: 886-2-26013032



Sullair Screw Vacuum Pump VS10-VS32 ■ 4-150kW



The Only Air Compressor Manufacturer To Concentrate Exclusively On Screw Technology

Since 1965, Sullair has been leading the innovation in the field of screw compressor and vacuum technology. With more than 40-year experiences, Sullair is leading a new round of innovation in this field. Utilizing the most advanced technologies, equipments and manufacturing technique, Sullair provides customers the best air compressor and vacuum equipment in order to meet the customers' severe requirements. Sullair has led the industrial trends in the field with its first-class screw rotor design.

Sullair products are universally known around the world for its practical design, outstanding craftsmanship and superior quality. Sullair professionals provide you VS series 4-150kW Vacuum Pumps (air suction capacity: 2.2 - 100.2m³/min) with simple structure, easily operation and great performance by optimal design while to ensure the amazing reliability, stability and related performance specifications of Sullair products. In fact, its design has made the new standard for this industry in every respect.



This product was manufactured to the highest quality standards in an ISO9001 certified system.

Sullair Vacuum System: Reliable and Outstanding Performance of the System


Sullair screw vacuum pump series of products are widely used in: electronic vacuum, vacuum smelting aluminum, vacuum thermoforming, furniture vacuum clamp and holding, sealing bags/ printing/publishing vacuum adsorption, hospital central vacuum system, vacuum chemical and pharmaceutical manufacturing processes, vacuum can filling, vacuum food packaging, aerospace vacuum test and many other fields.



Sullair vacuum pump system has very high operating efficiency: VS series vacuum pump can reduce energy consumption by at least 20% compared to other types of vacuum pumps. In the working process, liquid ring vacuum pump has instability in new energy due to coolant temperature, while vanes of sliding vane vacuum pumps tend to wear off in operation. Both cannot match the stability and reliability offered by VS series vacuum pump.

Sullair VS series of vacuum pumps can offer users with smooth and stable operation and reliable and cost effective performance. The structure is rigid and of low noise. The VS series is vacuum pump of great attention in the industry. It is manufactured with the best quality components, and offers the inherent reliability of screw mechanism, maximum reliability and very low maintenance costs.

Sulliar Vacuum System: The Complete Solution



Vacuum Air End

- The screw rotors are manufactured by matching with excellent compress efficiency
- The design of slot line and pitch line reduces the inner leakage
- Patented design. low noise and excellent bearing ensures the air end stability and longer life
- BFR (Bearing Fluid Reservoirs) ensure the vacuum pump with excellent function for startup and on load performance

High Efficient Fluid/air Separator

- Replaceable cartridge-type component, easy to operate
- Two-stage separation reduces fluid run-off

Elastic Coupling

- Saving more than 5% energy than belt drive
- Eliminates maintenance expense associated with V-belts
- Provides accurate axis positioning
- Optimizes life of air end (pump), bearing and motor

Air Suction Automatic Regulating Device

- Match output with demand exactly
- Smooth system vacuum
- Free of air storage drum
- Reduces impact and abrasion caused by downtime

Air Inlet Filter

- Protects vacuum pump from contamination and easy maintenance access
- Vacuum pressure difference alarm and NPT screw or flange connection



Key Features of Sullstar Controller:


- 32-bit ARM7 CPU core, powerful and industrial-leading
- Oversized LCD capable of displaying 120 Chinese characters, is clear at a glance
- Multiple communication ports, such as Online, VSD, MODBUS, CAN, etc
- Online group control can be realized

Cooling Fan

- Light, well balanced and low noise centrifugal fan with outer rotor motor
- Unique anti-vibration, noise deduction design results in a noise level lower than 72 dB (A) when the machine is running under the rated condition


High Efficiency Motor

- Ip55 fully enclosed motor
- US NEMA energy efficient standards for high efficiency motor
- Ultra high starting torque design
- Low noise design. No-load LPA <75dB (A)
- Insulation class: F (Grade B test)

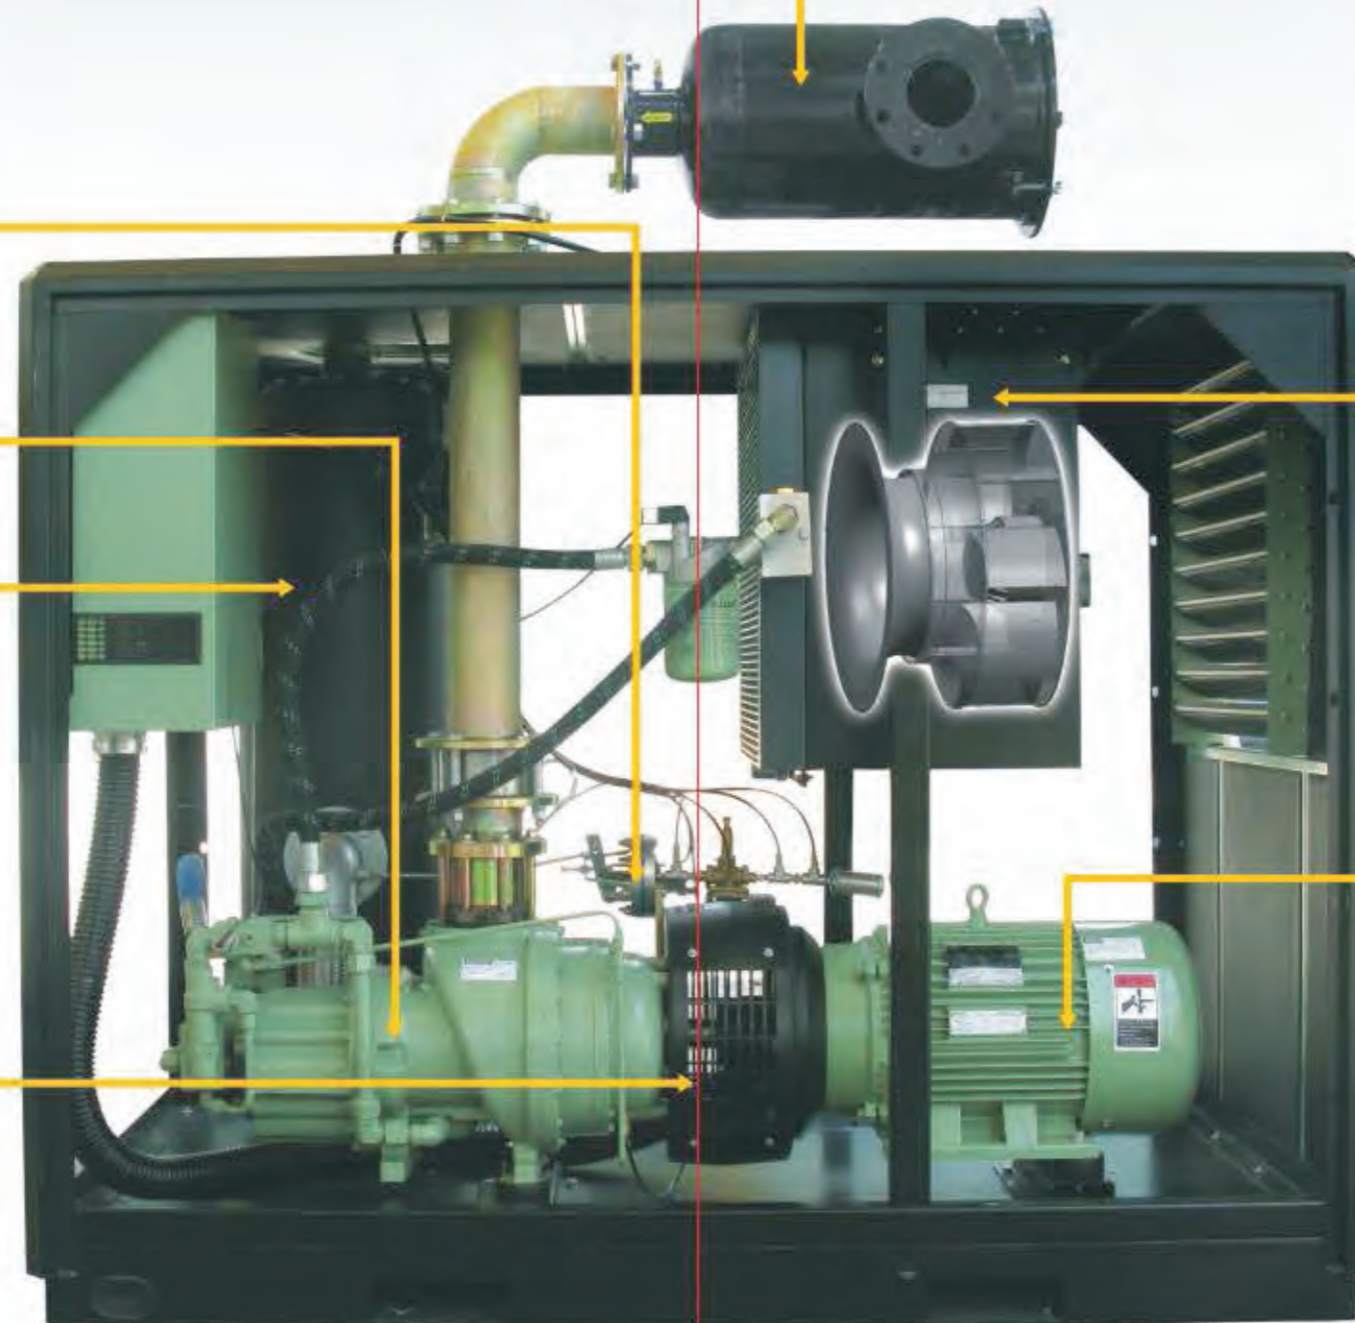

Notes: the above figures are for reference only, subject to the real machine.

Vacuum Pump Performance

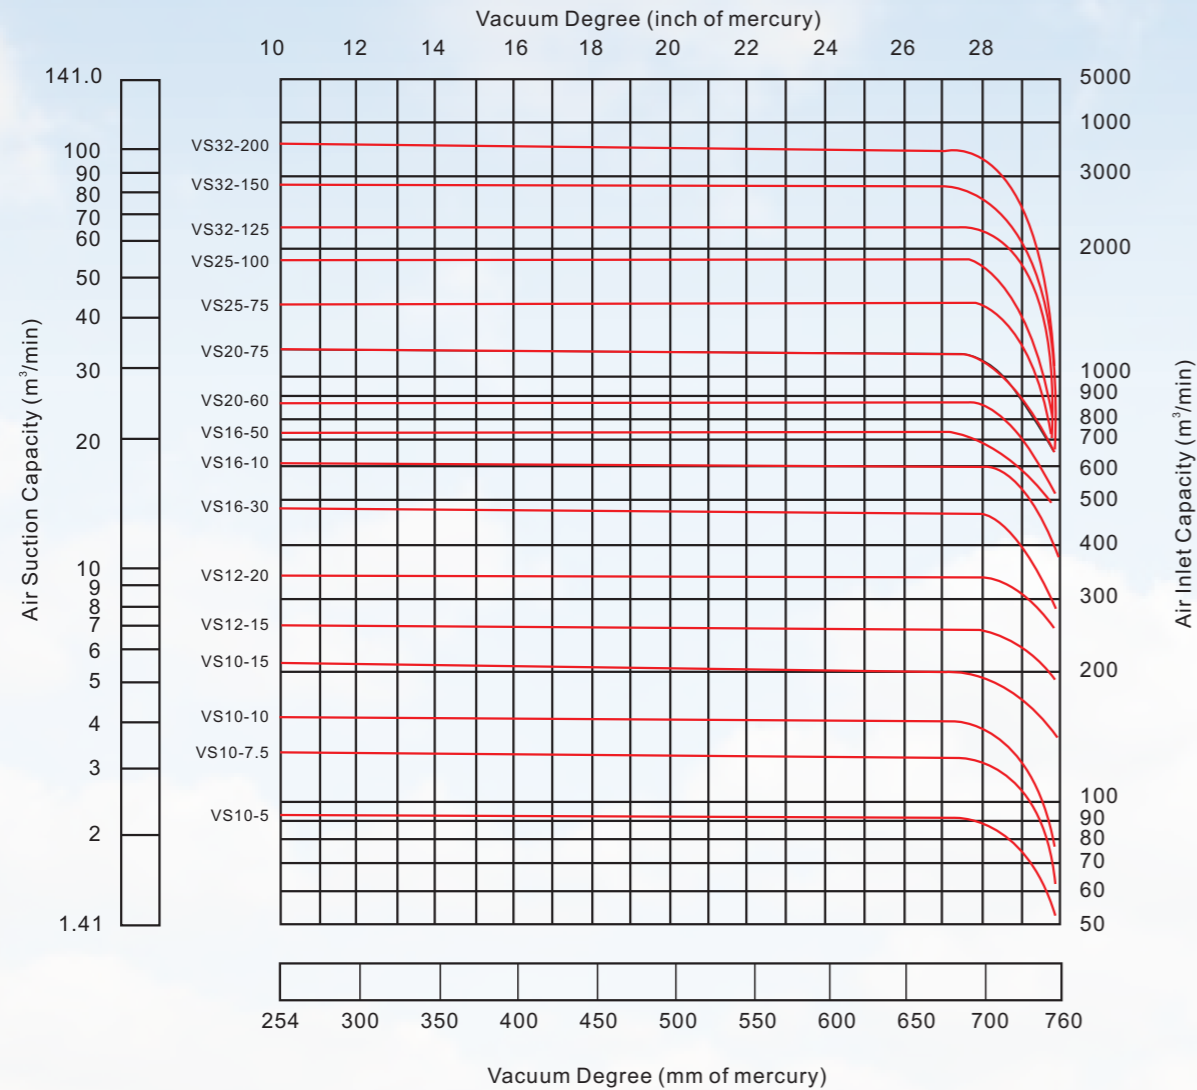

Technical Specifications

VS 10/12 Screw Vacuum Pump

Model	Motor HP	Motor KW	Shaft power KW	Air Suction Capacity m³/min	Max. Vacuum In.Hgv	Weight(kg)	Inlet/Outlet connection size (inch)
VS10-5	5	4	2.8	2.2	29.9	310	2.5/3
VS10-7.5	7.5	5.5	4.6	3.4	29.9	310	2.5/3
VS10-10	10	7.5	5.8	4.1	29.9	318	2.5/3
VS10-15	15	11	9.5	5.5	29.9	318	2.5/3
VS12-15	15	11	9.2	7.2	29.9	671	2.5/3
VS12-20	20	15	13.7	9.4	29.9	671	2.5/3

VS 16/20 Screw Vacuum Pump

Model	Motor HP	Motor KW	Shaft power KW	Air Suction Capacity m³/min	Max. Vacuum In.Hgv	Weight(kg)	Inlet/Outlet connection size (inch)
VS16-30	30	22	14.9	14.5	29.9	1206	4/4*
VS16-40	40	30	20.5	18.8	29.9	1206	4/4*
VS16-50	50	37	25.5	20.5	29.9	1422	4/4*
VS20-60	60	45	28.8	26.8	29.9	1735	5/5*
VS20-75	75	55	44.1	33.6	29.9	1735	5/5*

VS 25/32 Screw Vacuum Pump

Model	Motor HP	Motor KW	Shaft power KW	Air Suction Capacity m³/min	Max. Vacuum In.Hgv	Weight(kg)	Inlet/Outlet connection size (inch)
VS25-75	75	55	48.9	41.8	29.9	4000	5/8*
VS25-100	100	75	68.4	55.2	29.9	4100	5/8*
VS32-125	125	90	69.1	66.8	29.9	5200	10/8*
VS32-150	150	110	95.6	83.4	29.9	5400	10/8*
VS32-200	200	150	110.2	100.2	29.9	5600	10/8*

Dimensions (mm)

Model	Length	Width	Height	Model	Length	Width	Height
VS10 Series	1067	737	1270	VS20 SERIES	2350	1320	1730
VS12 Series	1664	973	1240	VS25 SERIES	2920	1850	2150
VS16 Series	2040/2200	1280	1610	VS32 SERIES	3455	1850	2150

Notes:

1. The above models are 50HZ only.
2. Air suction capacity at 24 inches HgG (in HgG. absolute 198mbar) vacuum, measured at standard sea level conditions.
3. Shaft power at 24 inches HgG (in HgG. absolute 198mbar) vacuum, measured at standard sea level conditions.
3. * are flange connection.
4. All are NPT screw thread connection except indicating the inlet and outlet size.